



INK SERVICE®
INK PRODUCTION FOR ALL PRINTING SYSTEMS



Quad-Head Thermal Inkjet

Drucker® T4H-A

The Drucker T4H-A inkjet printer offers an impressive combination of functionality and simplicity in one, compact design.



Uptime Advantage

- Extensive communications protocol ideal for remote control and secondary applications
- Solid-state electronics with no moving parts
- No wear items or replacement parts outside of inkjet cartridge replacement
- Clean, no-mess operation

Built in Productivity

- High resolution print (up to 600 dpi) suitable for high quality small and large font codes
- Wide range of primary and secondary packaging bar codes
- Can drive up to four printheads independently or together
- Ink level tracking that moves with the ink cartridge*

Code Assurance

- Template creation software with rules-based message fields
- Color touch screen with WYSIWYG image display to reduce set-up errors
- Selectable ink type setting ensures the right ink is being used*
- Optional USB scanner for message selection

Simple Usability

- Intuitive, graphical user interface with easy to learn icon-based controls
- Auto cartridge recognition*
- Four printhead designs to aid packaging line integration

* Feature available when using authentic Drucker TIJ ink cartridges

Drucker® T4H-A

Thermal Inkjet

Line Speed / Resolution Capability

Maximum resolution of 600x600 dpi
5-360fpm (1.5-109mpm) at 600x240 dpi
Higher line speeds are possible at lower horizontal print resolutions

Printing Capabilities

Full downloadable font support using TrueType® fonts
Fixed, variable and merged text fields
Flexible date/time and shift code formats
Auto best before date calculations
Auto incrementing/decrementing text and counters
Multiple graphic formats supported (up to maximum print area)

Bar Codes

EAN8, EAN13, UPC-A/E, CODE 39, CODE128, EAN128, GS1 DataBar (including 2D composite), DataMatrix, QR, PDF417

Print Cartridge

Maximum of four 12.7mm tall, 600 dpi print cartridges (stacked/stitched or deployed independently)
Features available with authentic Drucker TIJ ink cartridges: auto cartridge recognition and parameter set up, ink batch/lot number tracking; portable ink level tracking and enhanced print speeds

Display

7.2-inch TFT SVGA (800x600) full-color LCD and touch screen
WYSIWYG print preview
Full on-board diagnostics
Three levels of password protection or advanced configurable password protection
Extensive language support (22 in total)

Data Interface

RS232, Ethernet, USB memory stick support, Text Communications Protocols

Controller Dimensions

7.6" (195mm) long
4.9" (125mm) wide
1.5" (37.7mm) high

Dimensions exclude printhead, accessory cables and power supply connections

Printhead Dimensions

Four printhead options are available with different dimensions to meet line integration requirements. The following dimensions are for the Standard printhead:

4.5" (115 mm) long
3.4" (88 mm) high
2.2" (55 mm) wide (at rub plate)

Dimensions exclude cartridge and cable connections

Red, Green, and Gold printhead dimensions vary in length and height from Blue printhead

Temperature Range

41°F to 113°F (5°C to 45°C)


Electrical Requirements

100-240 VAC 50/60Hz


Approximate Weight (Controller)

1.2kgs (2.6lbs)

CERTIFIED
ISO 9001
DOCUMENTED QUALITY

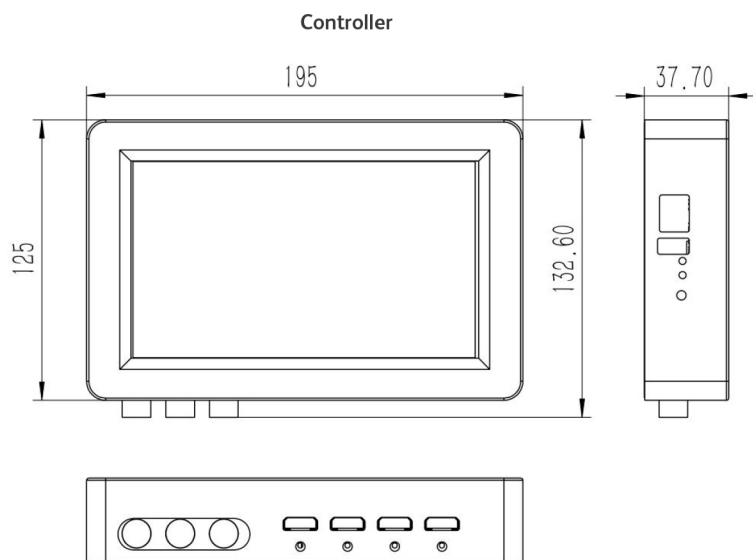

Standard Printhead

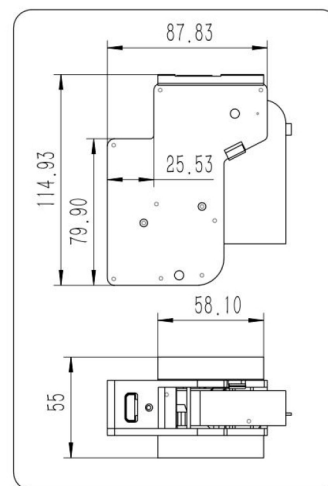

INK SERVICE®
INK PRODUCTION FOR ALL PRINTING SYSTEMS

Distributore ufficiale

DRUCKER